


Radiocontrol BRAVO M C4:

TECHNICAL DATA:

Transmitter protection level:..... IP65
Receiver protection level: IP67
Transmitter dimensions:.....275x170x180 mm
Receiver dimensions:.....220x200x75 mm
Transmitter weight:.....1,1 Kg
Working temperature:.....-20/+55°C
Voltage applicable to the contacts:.....30 V
Operating distance:.....150m
ISM band working frequency:.....863 - 870 MHz
Autonomy at 20°C: up to 20 ore
Stop protection:..... up to PL e
Protection against unintended movement.....PL d

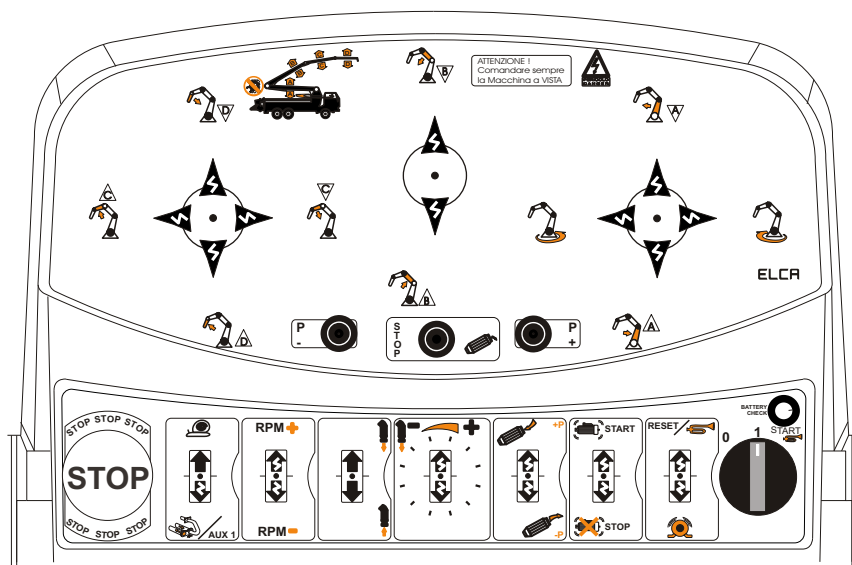

TRANSMITTER



RECEIVER WITH
CABLE PROTECTION
JACKET



BATTERY CHARGER



BATTERY

Legend:

	Spring return toggle switch		Push button
	Stay put toggle switch.		Rotary switch
	Spring return joystick		STOP push button
	Stay put joystick		0-1/0-1-START key switch ..
	Proportional spring return joystick		Potentiometer
	Coulisse for joystick		

A single arrow indicates a single command.

PROPORTIONAL RADIO REMOTE CONTROL SYSTEM WITH AUTOMATIC FREQUENCY CHANGE AND VOLTAGE OUTPUT:

- n. 01 waist portable trasnmitting unit with: internal antenna and commands as per above layout;
 - n. 01 receiver type BRAVO-D with: external antenna, 8-30 Vdc power supply and 60 pole connector output (wired);
 - n. 01 control battery charger type LI-TE ION 12-30 Vdc;
 - n. 02 rechargeable batteries type LI-TE Li-Ion 7,4V 2,2Ah;
- Multilingual instruction manual, EU certificate

ACCESSORIES INCLUDED IN THE PACKAGE:

Waist-belt