

TEL-VAI




ELCA
RADIOCOMANDI

Elca s.r.l.
Via del Commercio, 7/B
36065 Mussolente (VI)

TECHNICAL DATA:

Power voltage supply: 12/24 Vdc
Maximum capacity of the command circuit contacts: 6A
Protection degree: IP65
Dimension: 145x61x67 mm
Weight: 0.3 Kg
Working temperature: -20/+70°C


OPTION: All versions are available with mushroom type emergency stop button. In which case we require electrical drawings.

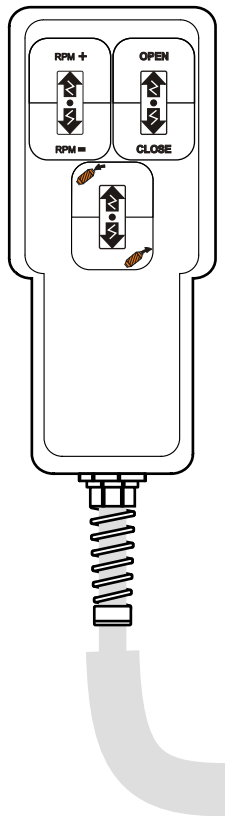

composed of 3 toggle switches (3 position spring return) for RPM+/-, open/close, charge/discharge drum.

flexible cableglan output with 3mt extraflex cable (10 pole)


Article:
TLVA03BTXXE01

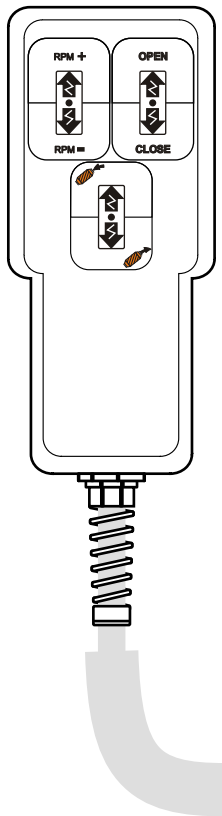

composed of 3 toggle switches (3 position spring return) for RPM+/-, open/close, charge/discharge drum.

flexible cableglan output with 3mt extraflex cable 10 pole and round connector (31p)

Article:
TLVA03BTXXE02

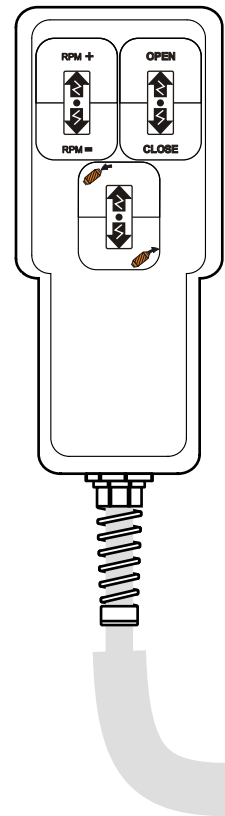

composed of 3 toggle switches (3 position spring return) for RPM+/-, open/close, charge/discharge drum.

flexible cableglan output with 3mt extraflex cable 10 pole and connector (CHVX 10p)

Article:
TLVA03BTXXE03

TEL-VAI



ELCA
RADIOCOMANDI

Elca s.r.l.
Via del Commercio, 7/B
36065 Mussolente (VI)

TECHNICAL DATA:

Power voltage supply: 12/24 Vdc
Maximum capacity of the command circuit contacts: 6A
Protection degree: IP65
Dimension: 145x61x67 mm
Weight: 0.3 Kg
Working temperature: -20/+70°C

OPTION: All versions are available with mushroom type emergency stop button. In which case we require electrical drawings.

<p>composed of 3 toggle switches (3 position spring return) for RPM+/-, open/close, charge/discharge drum plus a 2 position (stay put selector) for stop drum</p>	<p>composed of 3 toggle switches (3 position spring return) for RPM+/-, open/close, charge/discharge drum plus a 2 position (spring return selector) for stop drum</p>	<p>composed of 3 toggle switches (3 position spring return) for RPM+/-, open/close, charge/discharge drum plus a 2 position (spring return selector) for stop drum</p>	<p>composed of 3 toggle switches (3 position spring return) for RPM+/-, open/close, charge/discharge drum plus a 2 position (spring return selector) for stop drum</p>
<p>flexible cableglad output with 3mt extraflex cable (10 pole)</p>	<p>flexible cableglad output with 3mt extraflex cable (10 pole)</p>	<p>flexible cableglad output with 3mt extraflex cable 10 pole and round connector (31p)</p>	<p>flexible cableglad output with 3mt extraflex cable 10 pole and connector (CHVX 10p)</p>
<p>Article: TLVA04BTXXE04</p>	<p>Article: TLVA04BTXXE02</p>	<p>Article: TLVA04BTXXE03</p>	<p>Code: TLVA04BTXXE01</p>