

# SILUX H



TRASMITTENTE



RICEVENTE



CARICABATTERIA



BATTERIE

**ELCA**  
RADIOCONTROLS

Elca s.r.l.  
Via del Commercio, 7/B  
36065 Mussolente (VI)

## TECHNICAL DATA:

Transmitter protection level: IP65  
Receiver protection level: IP65  
Transmitter dimensions: 85x170x68 mm  
Receiver dimensions: 135x255x85 mm  
Transmitter weight: 0,5 Kg  
Working temperature : -20/+55°C  
Voltage applicable to the contacts: max 220 V  
Operating distance: 150m  
ISM band working frequency: 433,100-434,790 MHz  
Autonomy at 20°C: approx. 20 hours

### Symbol description



Spring return toggle switch.



Stay put toggle switch.

**A single arrow indicates a single command.**



Start push button.



Push button.



Rotary switch.



STOP push button (and replaces the key where not available).




ON-OFF key switch.



START key switch.



Electronic key (enable START function)

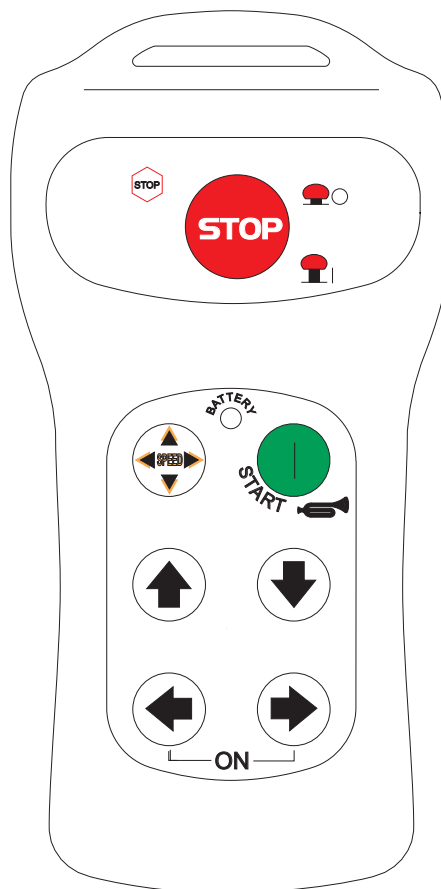

rif. GESIHPA-00

ARTICLE: GESIHPAXXE01

### ON/OFF INDUSTRIAL SAFETY RADIO REMOTE CONTROL SYSTEM CONSISTING OF:

- n. 01 ergonomic hand-held transmitter with: internal antenna and commands as per above layout;
- n. 01 receiver type "Flexi-A" with: internal antenna, **24-48-55 Vac power supply** and cable gland output (not wired);
- n. 01 control battery charger type: "CONTROL-GE 80-250 Vac";
- n. 02 rechargeable batteries type: "PINC-GE NiMH 7,2V 700mAh";
- Multilingual instruction manual, EU certificate

### ACCESSORIES INCLUDED IN THE PACKAGE:

- Wrist-belt